



BUSCH

All-in-one operation key

made of stainless steel

Operating key

- Infinitely adjustable capability for the operating height by utilising clamping bolts: 860 - 1360 mm
- Simplified exchange for the coupling collars by means of integrated compression springs
- Folded only 210 × 950 mm small (with coupling sleeves)
- More safety with reflective tape
- Integrated torch holder
- LEAKPEN mounting utilising a coupling collar

Torque


- High torque due to infinitely adjustable capability for the lever rod using an adjusting screw
- Distortion safe up to 350 Nm

Material

- Stainless steel 1.4301 (304)

Scope of delivery

- Operating key made of stainless steel
- With one standard coupling sleeve each for house connection and gate valve made of stainless steel
- Transport bag

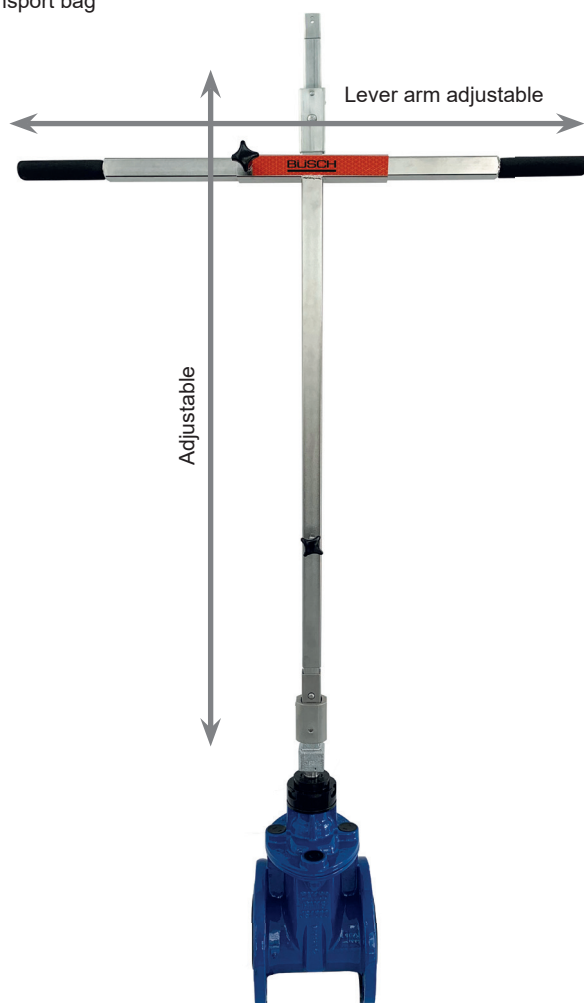

All-in-one operating key with attached coupling sleeve for house connection



Integrated holder with torch



Detailed view (from left) attached coupling sleeves made of stainless steel for house connection and penstock

i

YOUR ADVANTAGES

- **FLEXIBLE USE**
Tool-free replacement of house connection to section valve coupling sleeve
- **ERGONOMIC**
Infinitely height-adjustable from 0.8 m to 1.3 m
- **HIGH POWER TRANSMISSION**
Infinitely adjustable lever arm
- **DURABILITY**
Stainless steel makes the All-in-one extremely durable and robust



Operating key KOMBI and Standard

made of hot-dip galvanized steel

FOR OPERATING UNDERFLOOR INSTALLED VALVES

Connection

- Square 14 and 27
- Square 27

KOMBI operating key for house connection and valves
Standard operating key for penstocks

Material

- A36-hot-dip galvanized

Dimensions

- Height 1010 mm
- Width 800 mm



Standard operating key with square coupling sleeve 27



KOMBI operating key with square coupling sleeve 14 and 27

with interchangeable coupling sleeve square 27

i

YOUR ADVANTAGES

- **FLEXIBLE USE**
Tool-free replacement of house connection to section valve coupling sleeve (KOMBI)
- **EASY OPENING OF STREET CAPS**
thanks to a practical hook (optional with standard operating key)
- **WORK SAFELY**
due to rubberized handles

2024-02-01-en