




Product overview penstocks

Sluice gate penstock

Wedge gate penstock

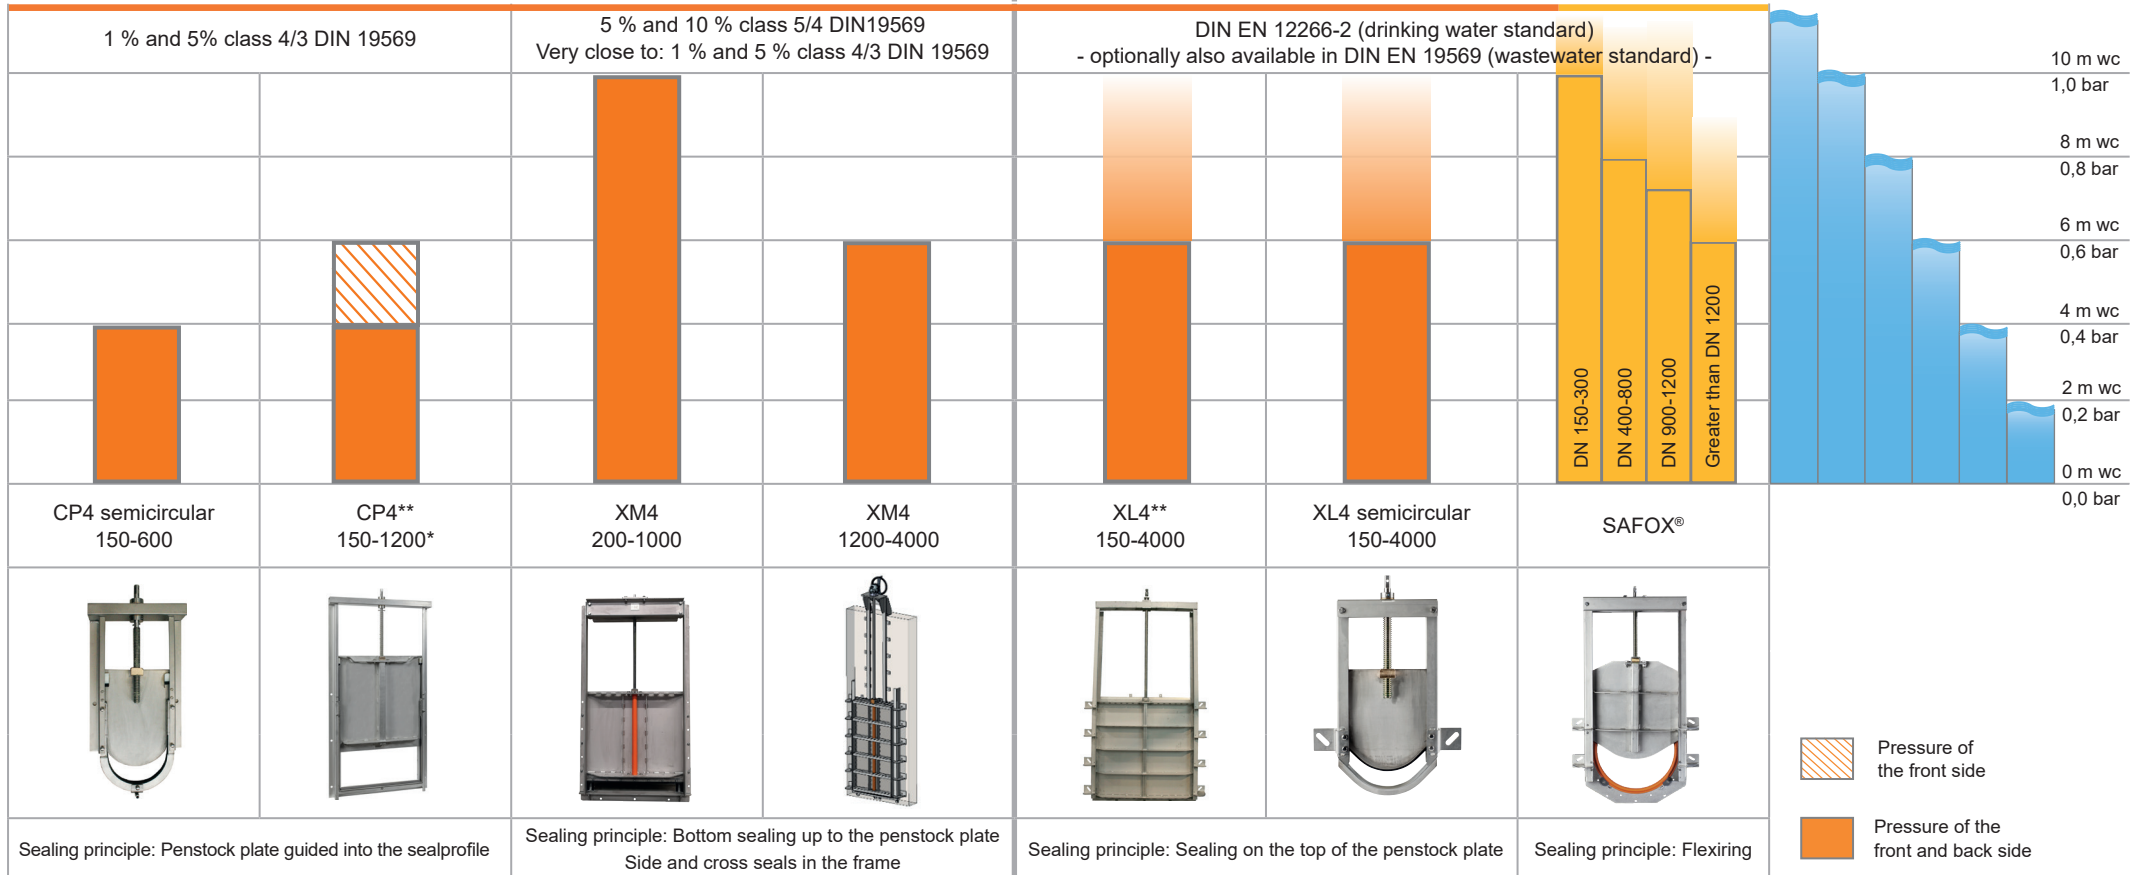

i The BÜSCH UNO procedure for EPDM and NBR. All BÜSCH angle joints are vulcanised, according to the requirements of the hydraulic steel construction standards. BÜSCH butt joints (SAFOX®) are butt-welded, which corresponds to a similar procedure in accordance with the standards for hydraulic steel construction.

All informations in mm. Penstocks also available on request for higher pressures.
 * CP4 from 900 mm 3 m wc on the back side ** also available as lowering type penstock