


Product overview penstocks

Sluice gate penstock

Wedge gate penstock

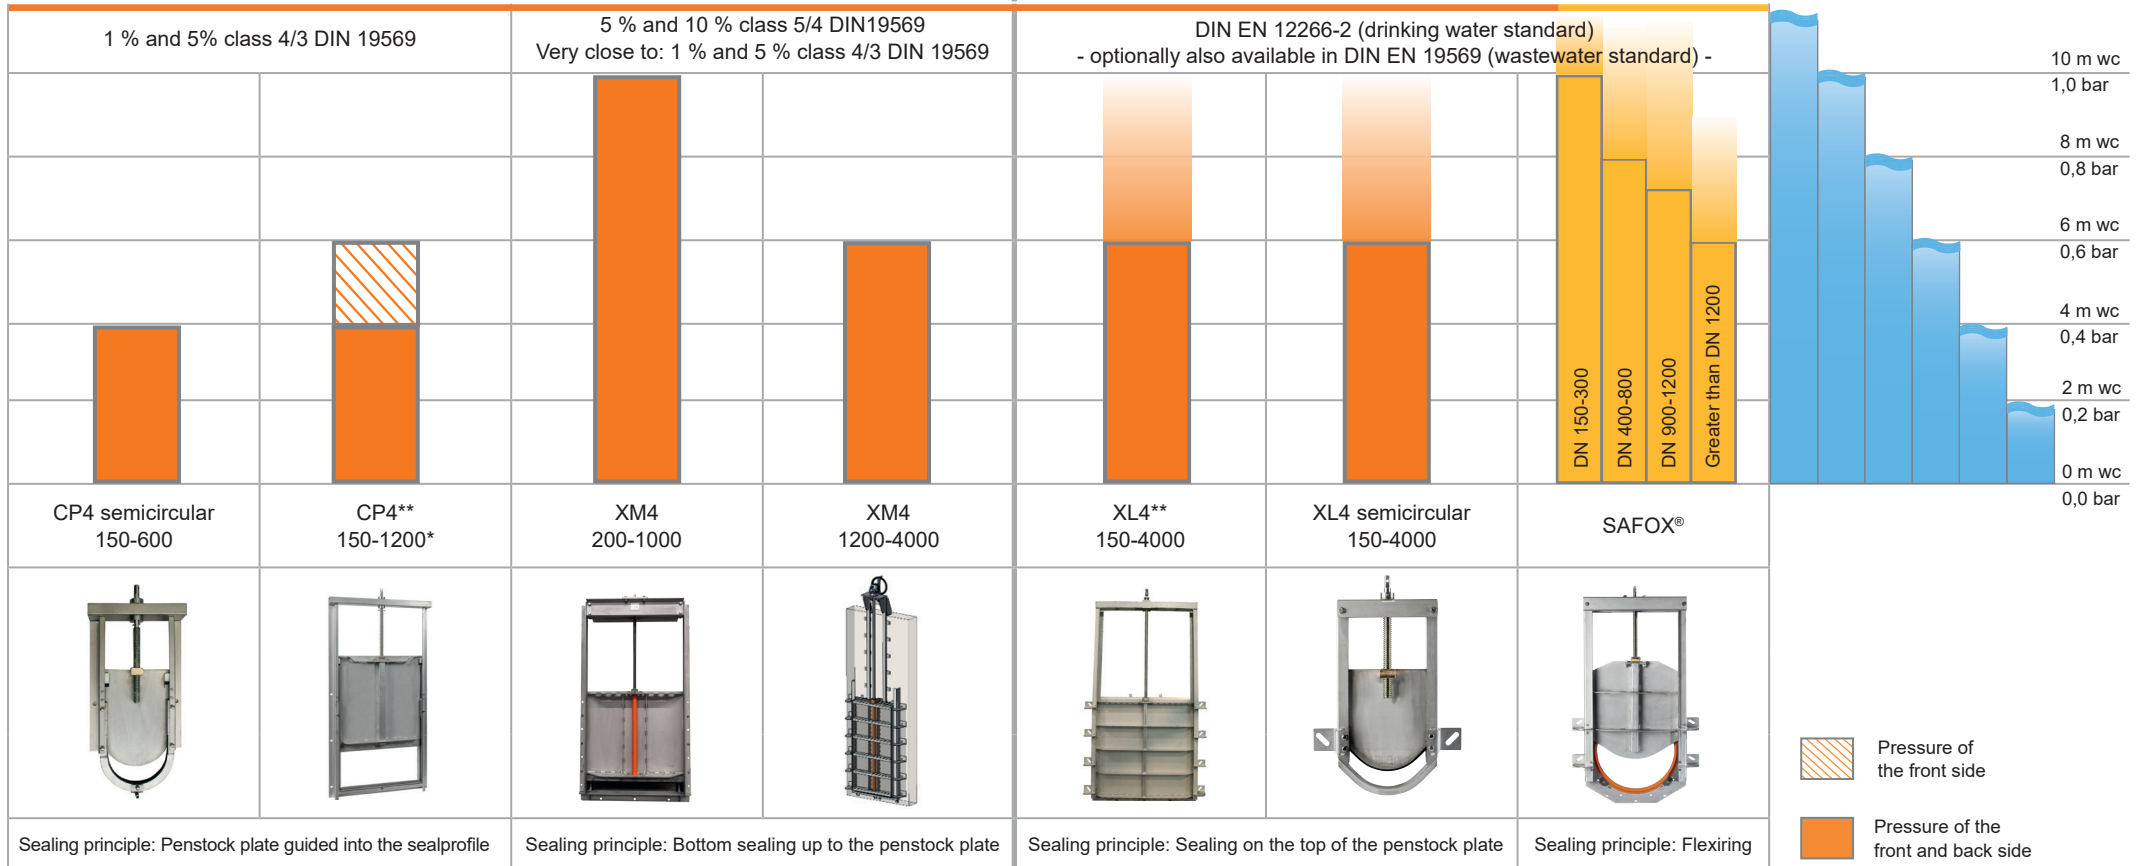

The BÜSCH UNO procedure for EPDM and NBR. All BÜSCH angle joints are vulcanised, according to the requirements of the hydraulic steel construction standards. BÜSCH butt joints (SAFOX®) are butt-welded, which corresponds to a similar procedure in accordance with the standards for hydraulic steel construction.

All informations in mm. Penstocks also available on request for higher pressures.
* CP4 from 900 mm 3 m wc on the back side ** also available as lowering type penstock