



## Bar screen

made of stainless steel or steel hot-dip galvanized

### Size

- All rectangular dimensions up to 4000 x 4000 mm
- Various opening widths can be selected

### Designs

Solid welded construction:

- Square
- Rectangular
- Foldable/lockable
- For slope mounting
- Special forms - customer-specific adjustments regarding shape and lattice bars

### Material frame and bars


- Stainless steel 1.4301 (304) / 1.4404 (316L) / A36-hot-dip galvanized
- Other materials on request

### Mounting

- Dowelling in front of the opening
- Dowelling in the opening
- Concreting in the building



Bar screen 1800 x 4400 mm in front of a leakage penstock

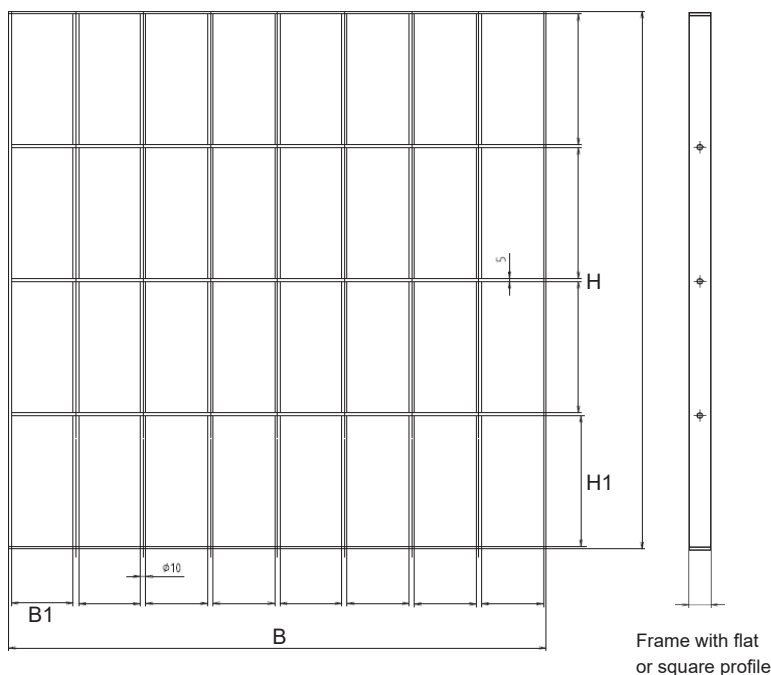

Dimensions as required: width (B), height (H), distance between bars horizontally (B1) and vertically (H1), frame designs (according to the conditions of the building): flat material, angle profile, rectangular profile  
Types of installation: dowelling or setting in concrete



Curved bar screen on inlet edge

### YOUR ADVANTAGES

- **PERFECT CORROSION PROTECTION**

All welded stainless steel parts from our own pickling plant

i

2024-02-05-en